



Flood Sensor | SF 9760
User Manual



Contents

Salusfin Flood Sensor.....	2
Gateway Installation.....	2
Account registration	3
Salusfin Flood Sensor Installation.....	3
Features.....	4

Salusfin Flood Sensor

Thank you for buying a Salusfin solution.

This user guide will ensure that you will have your Flood Sensor | SF-9760 setup.

This Flood sensor is a Z-Wave device which lets you detect water e.g. under the dishwasher

In the control center, you can set up different heating modes to efficiently control heat consumption in your home, thus saving energy.

The device is powered by CR14250 battery. Low battery is reported to the gateway, which then sends a notification mobile APP.

Gateway Installation

Please Ensure that you have configured the Gateway to your network before installing the components.

For Gateway Installation Please refer to Salusfin Gateway installation Manual.


Account registration

Navigate to Salusfin Home manager in your browser

<https://control.salusfin.com>

Enter your existing login credentials used for Gateway Installation and click **“Sign In”**

WELCOME TO THE SALUSFIN LOGIN PAGE



Login to your account

E-mail

Password

[Reset Password](#)


Salusfin Flood Sensor Installation

Choose Install and select **“Flood Sensor | SF-6970”** from the list to install.

Please install the gateway first (Gateway Lite, Gateway Pro, Gateway GSM).


Add-Ons

- Gateway Lite | SF-930
- Gateway Pro | SF-901
- Gateway GSM | SF-910
- Power Reader | SF-9021
- Gas Reader | SF-9121
- Smart Plug | SF-9300
- Motion Sensor 4in1 | SF-9700
- Door Sensor 4in1 | SF-9720
- Smoke Detector | SF-9740
- Flood Sensor | SF-9760**
- Thermostat | SF-500



Insert the CR14250 battery into the battery compartment.

Click “Start Paring”.

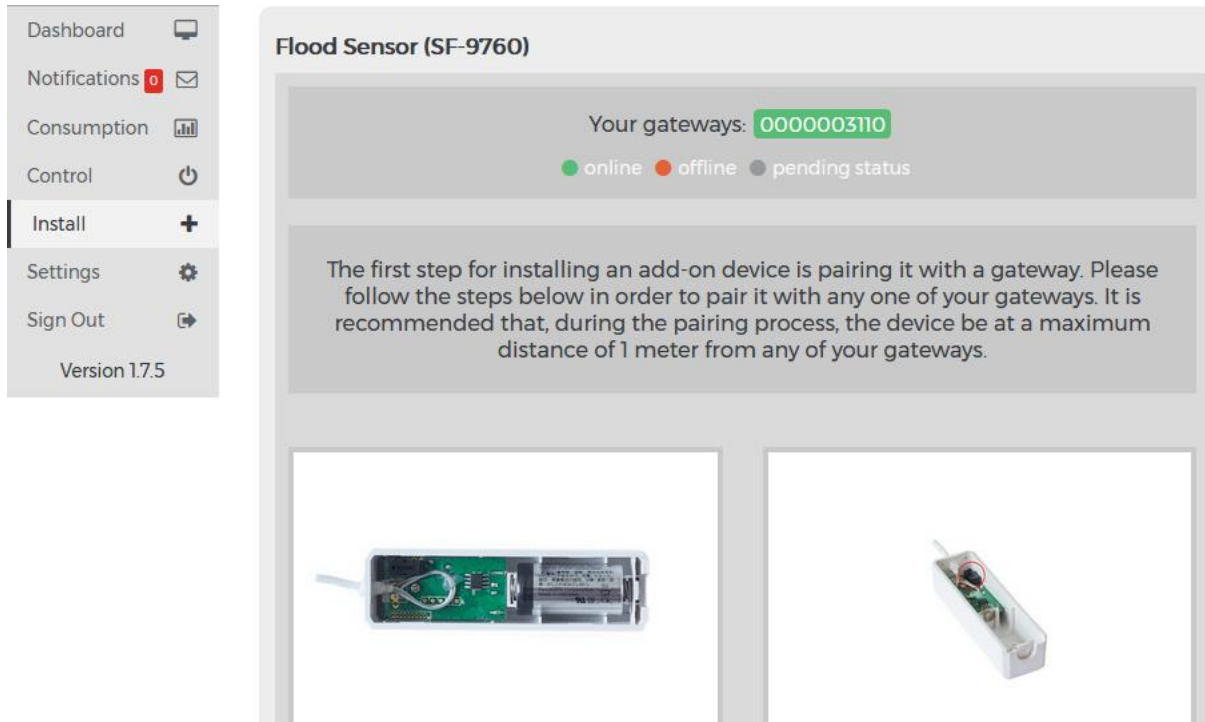

The device will now be paired with the gateway.

Features

Small sensor head suitable for narrow spaces

Send alarm notifications

2 meters long wire for flexible installation

Low battery notification