


Picture 1

Connector no Q is used to control the contactor in picture 2 below. Switches I1 - I3 are optional. Please ensure that the relay is behind a current protecting fuse of 10A (F)



Picture 2

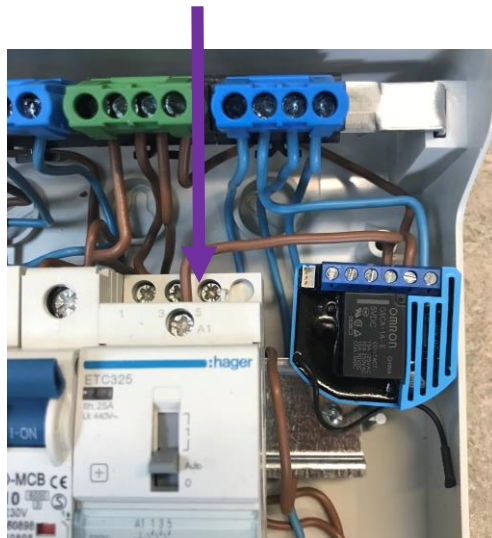

Picture 3

TECHNICAL DATA

Power supply	(110 to 230) V AC \pm 10 % 50/60 Hz*, (24 to 30) V DC
Rated load current of AC output	0.85 A/230 V AC
Rated load current of DC output	0,85 A/30 V DC
Output circuit power of AC output (resistive load)	200 W (230 V AC)
Output circuit power of DC output (resistive load)	21 W (24 V DC)
Power monitoring accuracy	\pm 2 W
Digital temperature sensor range (sensor must be ordered separately)	(-50 to 125) °C
Operation temperature	(-10 to 40) °C
Distance	up to 30 m indoors
Dimensions (W x H x D)	18 mm x 93 mm x 58 mm
Package dimensions (W x H x D)	21 mm x 95 mm x 64 mm
Weight	50 g
Gross weight (packaging included)	56 g
Electricity consumption	0.7 W
For installation in boxes	DIN rail 35 mm
Switching	MOSFET (Trailing edge)

* 50Hz for ALL ORDERING CODES; 60Hz for ZMNHSD2

Picture 4